

## Axle suspension for rigid axles in vehicles

Publication number: EP1057665

Publication date: 2000-12-06

Inventor: BUHL REINHARD (DE)

Applicant: ZF LEMFOERDER METALLWAREN AG (DE)

Classification:


- international: **B60G7/00; B60G9/00; B60G21/05; B60G7/00; B60G9/00; B60G21/00;** (IPC1-7): B60G9/00; B60G7/00

- european: B60G7/00A; B60G9/00; B60G21/05C






Application number: EP20000117760 19960529

Priority number(s): DE19951021874 19950616; EP19960919592 19960529

Also published as:

 EP1057665 (B1)


Cited documents:

 US4084838  
 EP0430368  
 FR2563473  
 DE2505124  
 US4556234  
more >>

[Report a data error here](#)

### Abstract of EP1057665

The axle mounting is for a rigid axle of a commercial vehicle. The multiple linkage and the stabilisation device are configured as a four-point linkage (4) subject to torsional loading and integrating both functions. The four-point linkage is connected to the vehicle body on one side and to the vehicle axle (1) on the other side, via two transverse linkages (5-8) a distance apart from each other. The four-point linkage is connected to the vehicle axle from above.

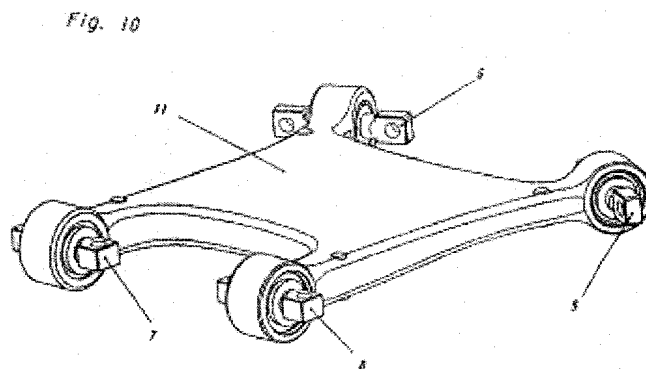

Data supplied from the **esp@cenet** database - Worldwide